



COLLECTION 2022



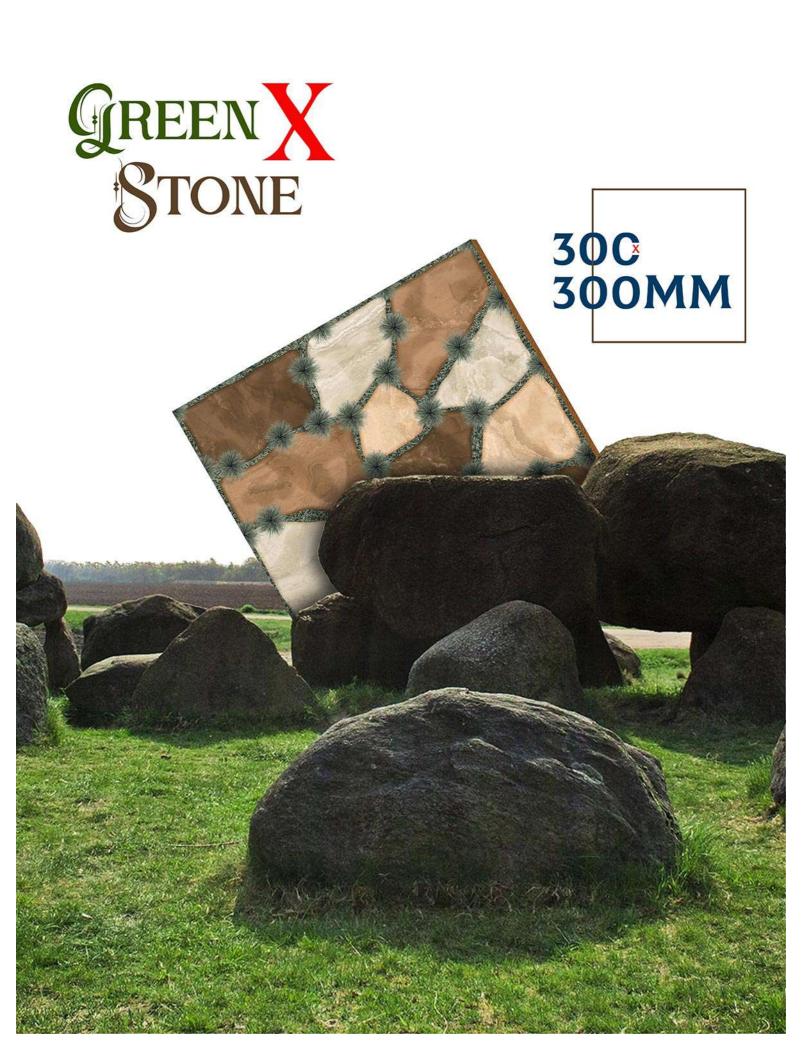

#### TEDD A770







MATT 300x300mm DIGITAL PARKING TILES





















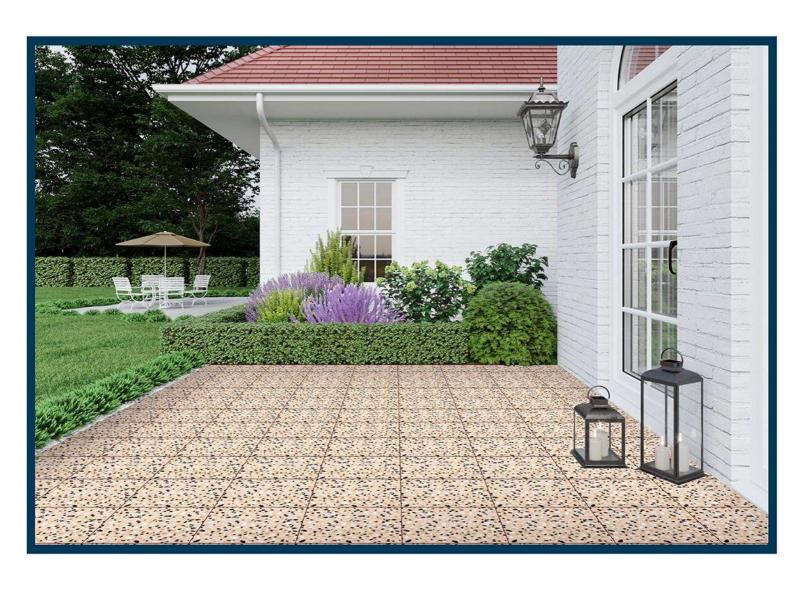



MATT 300×300mm DIGITAL PARKING TILES

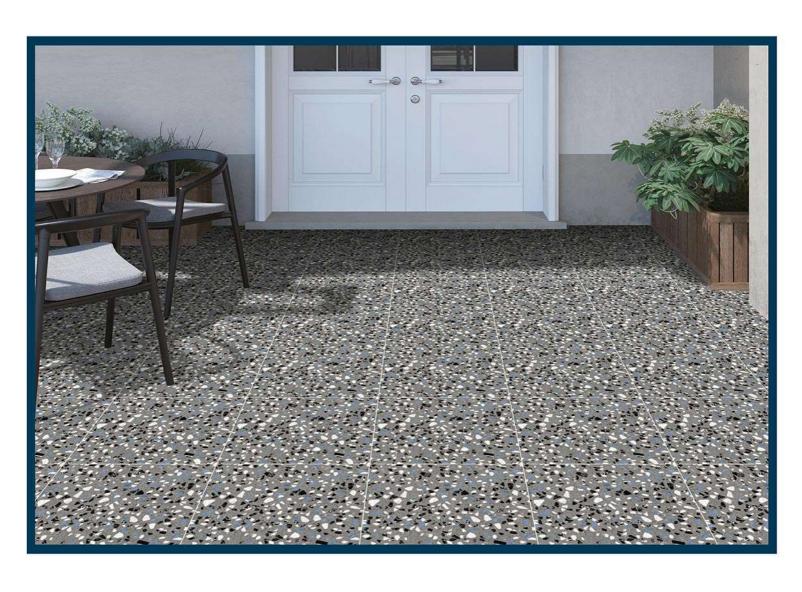












TERRAZZO



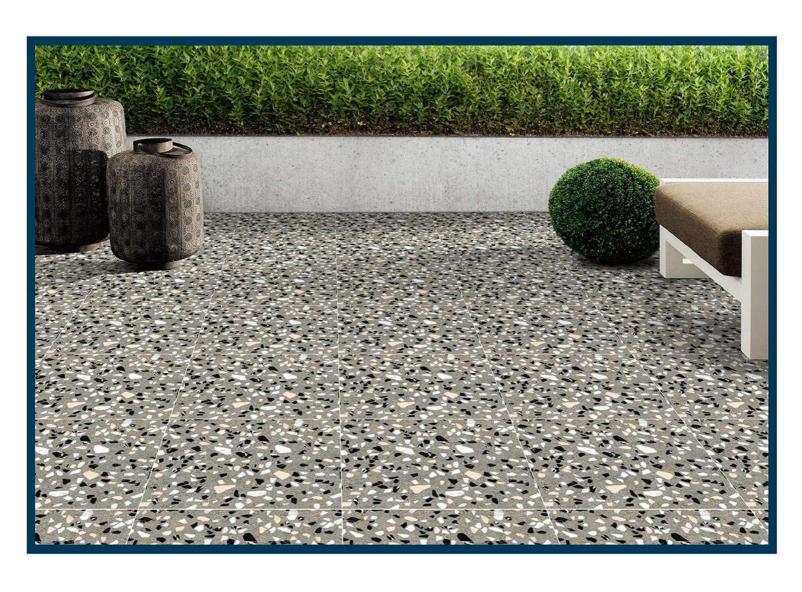







MATT 300x300mm DIGITAL PARKING TILES




TERRAZZO






TERRAZZO




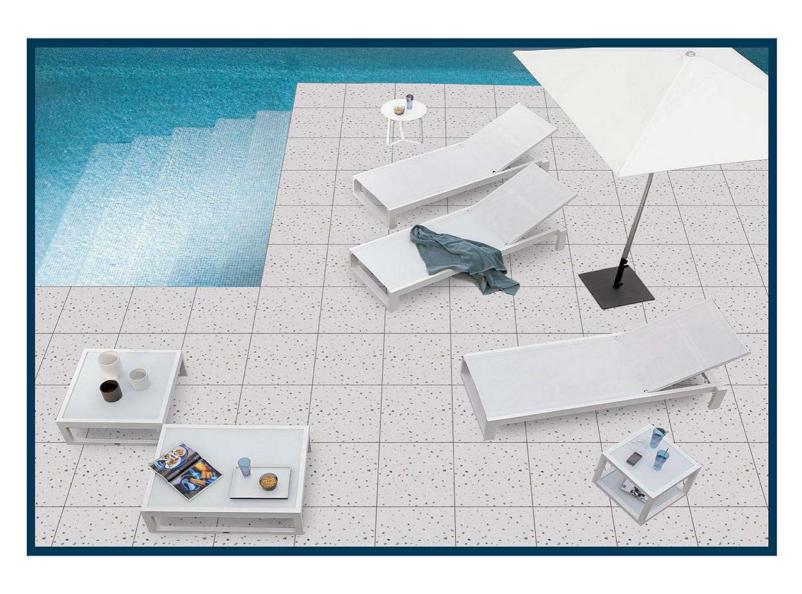








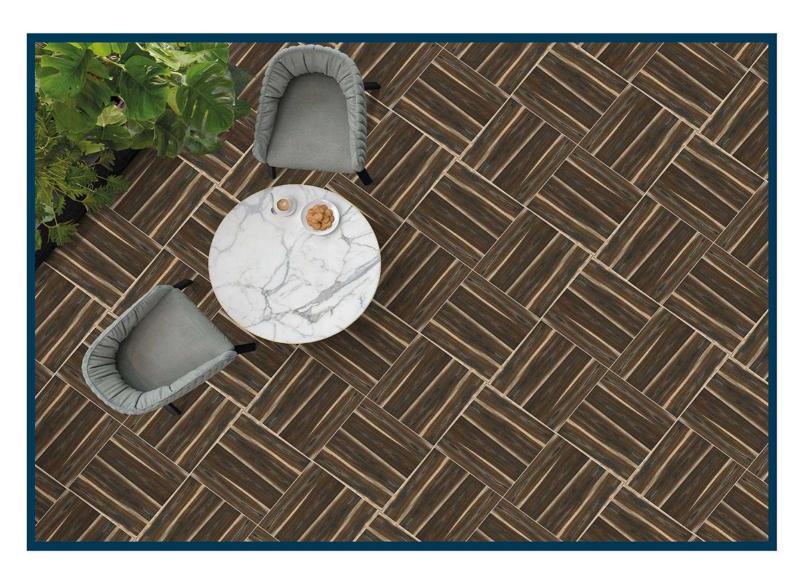



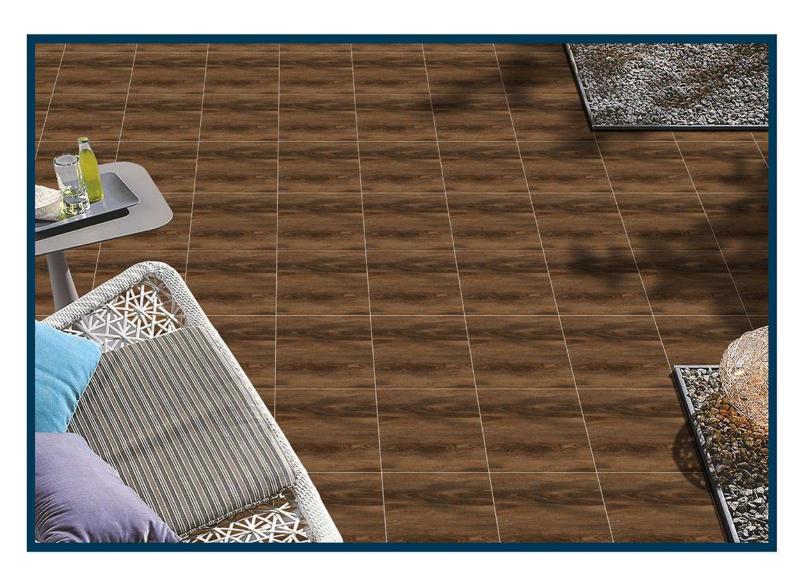













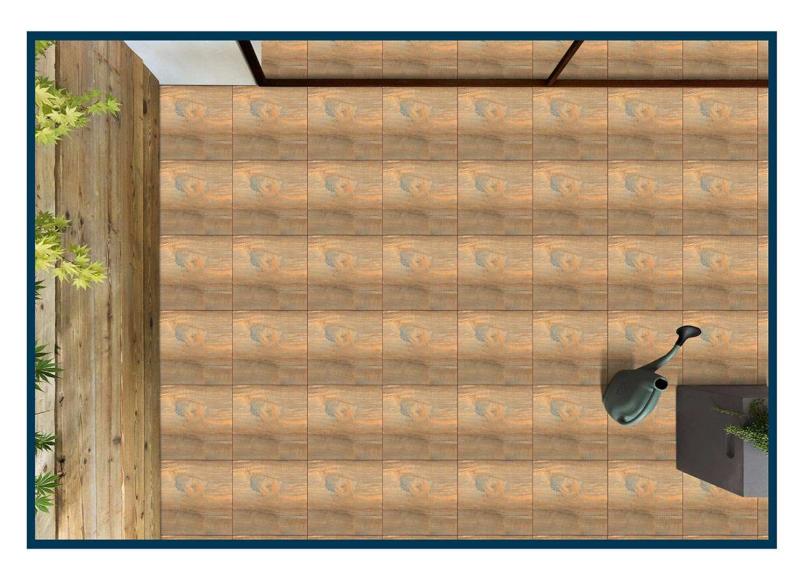







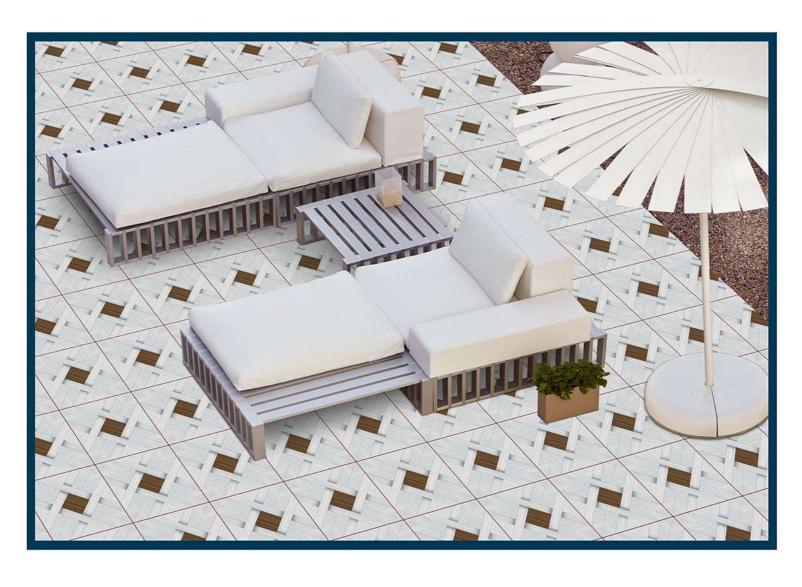














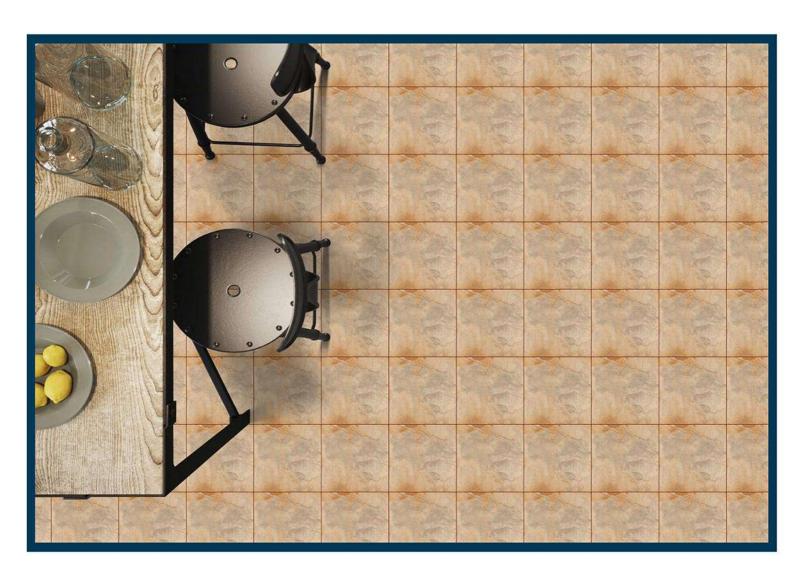







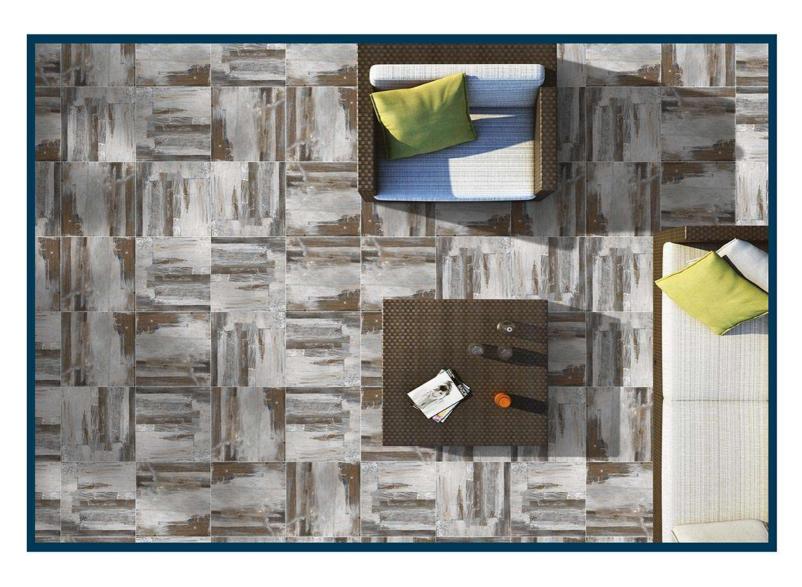




206\_(RANDOM)







207\_(RANDOM)

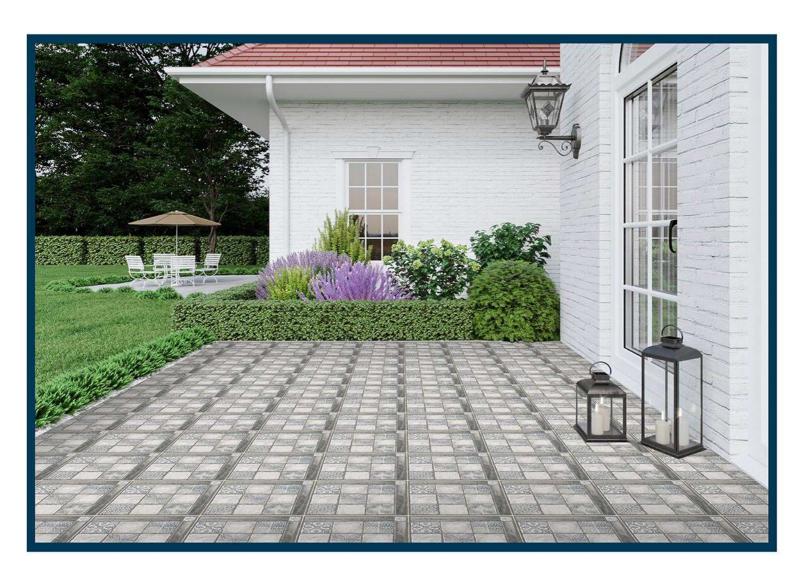





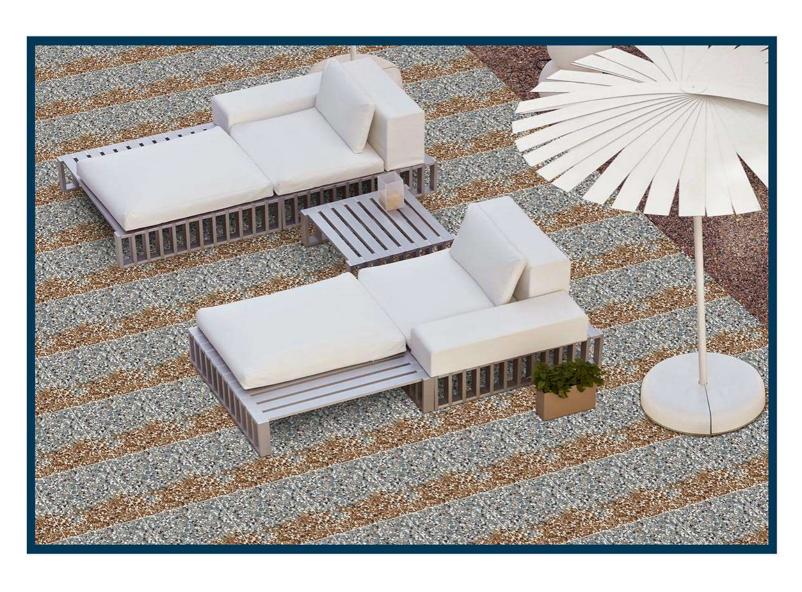







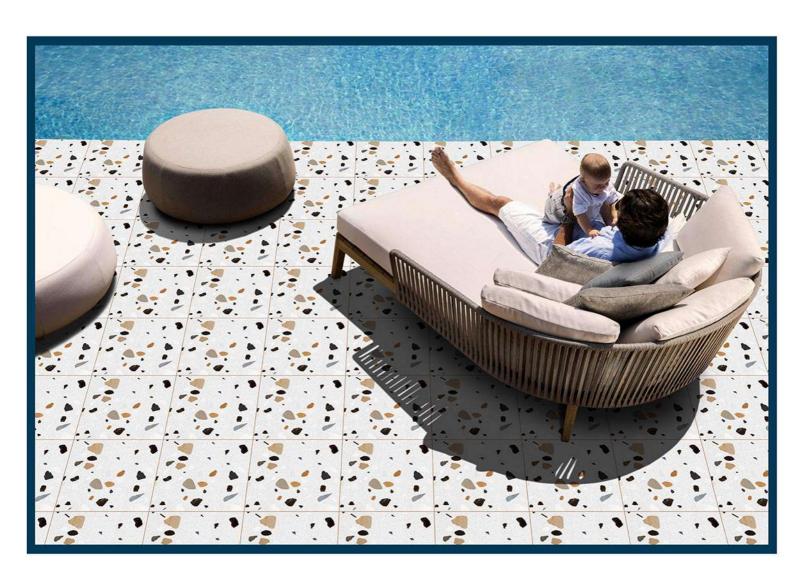





















# **Technical Specification**

| Sr. No. | Characteristics                        | EN:177B-11 AIS:13755 | SILVENTA VALUE<br>± 0.1%<br>± 1.0% |  |
|---------|--|----------------------|------------------------------------|--|
| 1       | Deviation in Length                    | ± 2.5%               |                                    |  |
| 2       | Deviation in Thickness                 | ± 2.5%               |                                    |  |
| 3       | Wedging                                | ± 1.0%               | ± 0.2%                             |  |
| 4       | Surface Flatness                       | ± 1.5%               | ± 0.2%                             |  |
| 5       | Water Absorption                       | < 2.0%               | < 0.5%                             |  |
| 6       | Mohs Hardness                          |                      | 8                                  |  |
| 7       | Flexural Strength                      | > 20 N/mm²           | > 45 N/mm²                         |  |
| 8       | Abrasion Resistance                    | < 204 mm² (EN 176)   | < 144 mm²                          |  |
| 9       | Thermal Expansion                      | 9×10.6 (EN 176)      | 6x10.6                             |  |
| 10      | Thermal Shock Resistance               | No Damage            | No Damage                          |  |
| 11      | Resistance to acid (Wt. Loss)          | < 1.5%               | < 0.4%                             |  |
| 12      | Skid Resistance (Friction coefficient) | > 0.4 (EN 176)       | > 0.6                              |  |
| 13      | Breaking Strength                      | ± 2.5%               | 400 Kg/cm <sup>2</sup>             |  |
| 14      | Stain Resistance                       | Resistant (EN 176)   | Resitant                           |  |
| 15      | Moisture Expansion                     | Nil (EN 176)         | Nil                                |  |

Note: 1. Our conformity to the above standards is applicable only for premium quality.

# **Packing Detail**

| Sr. No. | Size                    | Thickness<br>(mm) <sub>(Approx)</sub> | Pieces<br>Per Box | Area/Box<br>Sq. ft. | Area/Box<br>Sq. mt. | Wt./Box<br>Kgs. <sub>(Approx)</sub> |
|---------|-------------------------|---------------------------------------|-------------------|---------------------|---------------------|-------------------------------------|
| 1       | 300mm x 300mm (12"x12") | 9.00                                  | 8                 | 7.75                | 0.72                | 13.500                              |
| 1       | 300mm x 300mm (DG)      | 9.00                                  | 8                 | 7.75                | 0.72                | 13.500                              |
| 1       | 300mm x 300mm (DG)      | 9.00                                  | 8                 | 7.75                | 0.72                | 13.500                              |

- ${\bf 1.} \, {\bf Certain} \, amount \, {\bf of} \, {\bf size} \, {\bf and} \, {\bf shade} \, {\bf variation} \, {\bf is} \, {\bf inherent} \, {\bf in} \, {\bf all} \, {\bf ceramic} \, {\bf products}.$
- 2. Our conformity to the above First is applicable only for Quality.
- 3. Colour shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However the company reserve the right to change the specification without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. It is suggest to check the tiles before purchase any laying as the company dose not accept responsibility once the tiles are laid.

### Features:



















Suitable For Floor

Frost Resistence

Anti Slip

Break Resistence

Easy To Install

Chemical Resistence

Resistence To Abrasion

Maintenance

Eco Friendly



# Mfg. of Digital Parking Tiles

8-A, National Highway,
B/h. Lalpar GEB, Jambudiya,
Morbi - 363 642 (Gujarat) INDIA

www.lorenatiles.com

info@lorenatiles.com

